


KIRAY 200
Infrared thermometer

New




Supplied with thermocouple K probe



Distance from the target

Distance	150	300	900	mm
Diameter	5	10	30	mm

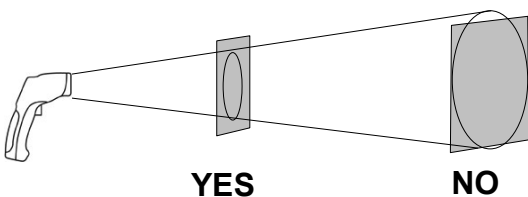

Make sure that the target is larger than the size of the laser sighting.

Infrared thermometer **KIRAY 200** is an infrared thermometer used to diagnose, inspect and check any temperature. Thanks to its elaborated optical system, it allows an easy and accurate measurement of little distant targets. **KIRAY 200** instrument has an internal memory which can save up to 20 measurements.

Technical features

Instrument features


- Spectral response**..... 8 -14 μ m
- Optical**..... D.S : 30:1 (50 mm at 1500 mm)
- Response time**..... Less than 1 second
- Temperature range**..... From -50 to +850°C
- Accuracy***..... From -50 to -20°C : $\pm 5^\circ\text{C}$
From -20 to +200°C : $\pm 1.5\%$ of reading $\pm 2^\circ\text{C}$
From +200 to +538 °C : $\pm 2\%$ of reading $\pm 2^\circ\text{C}$
From +538 to +850°C : $\pm 3.5\%$ of reading $\pm 5^\circ\text{C}$
- Display resolution**..... 0.1 °C
- Emissivity**..... Adjustable from 0.10 to 1.00 (pre-set at 0.95)
- Over range indication**..... Display indication : « -0L » for a negative over range, « 0L » for a positive over range.
- Laser sighting**..... Wavelength : 630-670 nm
Output < 1mW, Class 2 (II)
- Positive or negative temperature indication**..... Automatic (no indication for a positive temperature)
(-) sign for a negative temperature
- Display**..... 4 ½ digits with LCD backlighted display
- Auto-extinction**..... Automatic after 7 seconds of inactivity
- High/low alarm**..... Flashing signal on display and beep signal with adjustable thresholds
- Power supply**..... Alkaline 9V battery
- Autonomy**..... 38 h (inactive laser and backlight)
15 h (active laser and backlight)
- Use temperature**..... From 0 to +10°C for a short period
From 11 to +50 °C for a long period
- Storage temperature**..... From -20°C to +60°C
- Relative humidity**..... From 10% to 90%RH in operating mode and >80%RH in storage
- Dimensions**..... 175 x 110 x 45 mm
- Weight**..... 230 g (included battery)
- Memory**..... 20 temperature values with unit of measurement (°C or °F)

*Accuracy for an ambient temperature from 18 to 28°C (with a relative humidity lower than 80% RH)

Thermocouple K probe features

- Temperature range**..... From -40 to +400°C
- Display range**..... From -50 to +1370°C
- Resolution**..... 0.1°C
- Accuracy**..... $\pm 1.5\%$ of reading $\pm 3^\circ\text{C}$
- Cable length**..... 1 m

Display

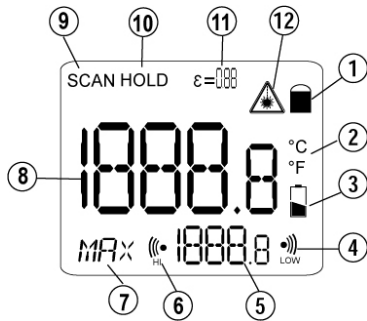

- 1 – Continuous measurement indicator
- 2 – Technical unit (°C / °F)
- 3 – Low battery indicator
- 4 – Low alarm symbol
- 5 – MAX, MIN, DIF (difference between MAX and MIN values), AVG (average), HAL (high alarm), LAL (low alarm), TK (TK temperature) and LOG (recorded value)
- 6 – High alarm symbol
- 7 – EMS, MAX, MIN, DIF, AVG, HAL, LAL, TK and LOG indicator
- 8 – Temperature value
- 9 – Current measurement indicator
- 10 – HOLD indicator (fixed measurement)
- 11 – Emissivity value
- 12 – Laser in operation indicator

KIRAY 200 buttons



- 1 – Up button. It allows to increment emissivity and high/low alarm thresholds and to move to the next recorded value.
- 2 – Set button. It allows to activate or deactivate laser and display backlight. It allows also to record a temperature.
- 3 – Mode button. It allows to navigate through the modes (emissivity, max value, min value, difference, average, high alarm, low alarm, TK value and recorded values).
- 4 – Down button. It allows to decrement emissivity and high/low alarm thresholds and to move to the previous recorded value.

Description



Supplied with

- Case with passer-by belt
- User manual
- K thermocouple probe

CE Certification




This device meets with following standards' requirements.

- EN 50081-1 : 1992, Electromagnetic compatibility, Part 1
- EN 50082-1 : 1992, Electromagnetic compatibility, Part 2

Infrared thermometer, how it work ?

Infrared thermometers can measure the surface temperature of an object. Its optic lens catches the energy emitted and reflected by the object. This energy is collected and focused onto a detector. This information is displayed as temperature. The laser pointer is only used to aim at the target.

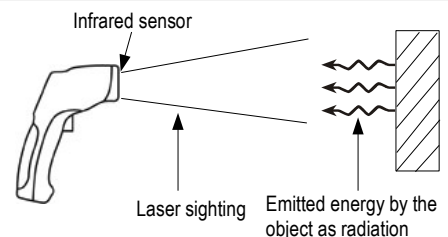

www.kimo.fr



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr

Distributed by :

DENVER
metrología electrónica, S.L.

Tel: +34 91 569 8006
info@denver.es - www.denver.es