


# Data Sheet

**DENVER**  
metrología electrónica, S.L.

## SDG800 Series

## Function/Arbitrary Waveform Generator

- ◆ DDS technology, Single-channel output
- ◆ 125MSa/s sample rate, 14bit vertical resolution.
- ◆ 5 types of standard output waveform, built-in 46 arbitrary waveforms(include DC)
- ◆ Complete set of modulation functions: AM, DSB-AM, FM, PM, FSK, ASK, PWM, Sweep, Burst
- ◆ Abundant input/output: waveform output, Synchronous signal output, external trigger input.
- ◆ Standard interfaces: USB Device, USB Host.
- ◆ Supplied with powerful arbitrary editing software
- ◆ Support remote control

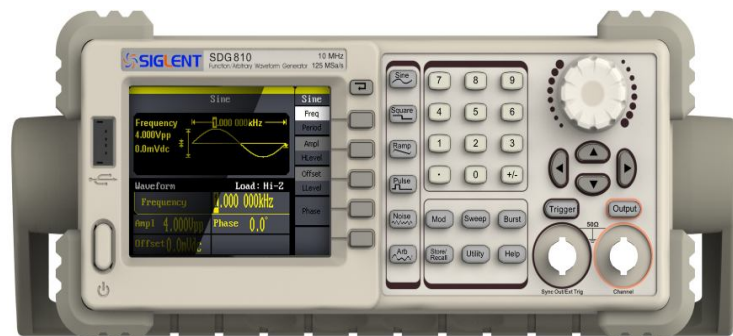

### Reasonable price & outstanding performance

SDG800 series Function/Arbitrary Waveform Generator is a new family member of SIGLENT with friendly design: 3.5 inch TFT-LCD display; Built-in Chinese/English language; Online help function; Support U disk and internal storage, facilitative files management.

### Application fields:

- ◆ Analog sensor
- ◆ Simulation environment signals
- ◆ Circuit function test
- ◆ IC test
- ◆ Researching and training

### Edit arbitrary waveform

Enables edition of 14-bit 16kpts arbitrary output waveforms, Arbitrary editing software EasyWave provides 9 standard waveforms: Sine, Square, Ramp, Pulse, ExRise, ExpFall, Sinc, Noise and DC, which meets all engineers' basic needs; In addition, it provides plenty of ways of manual drawing, point-to-point line drawing and arbitrary point drawing. It facilitates to create complex waveforms; Multi-file screen management helps users to edit multiple-waveform simultaneously. It provides 10 Storage in non-volatile RAM. You can edit and store more waveforms by EasyWave.

## Arbitrary waveform output

Built-in 46 arbitrary waveforms(include DC), including math, engineering and other commonly-used waveforms.

## Complete set of modulation functions, sweep output, burst output

- ◆ Complete set of modulation functions: AM, DSB-AM, FM, PM, FSK, ASK, PWM, the modulation waveform can be observed directly, which it is suitable for education and training;
- ◆ Sweep output: change output frequency from starting frequency to ending one within sweeping time, Sweeping time range: 1ms~500s. The carrier can be Sine, Square, Triangle and Arbitrary waveforms.
- ◆ Burst output: It can periodically generate pulse sequence. Internal counter and external control signal are available to control burst output.

## Specification

Model	SDG805	SDG810	SDG830
Max. output frequency	5 MHz	10 MHz	30 MHz
Output channels	1		
Sample rate	125MSa/s		
Arbitrary waveform length	16kpts		
Frequency resolution	1 $\mu$ Hz		
vertical resolution	14bits		
Waveform	Sine, Square, Ramp, Pulse, Gaussian Noise. 46 built-in arbitrary waveforms(include DC)		
Modulation	AM, DSB-AM, FM, PM, FSK, ASK, PWM, Sweep, Burst		
Standard interface	USB Host & USB Device		
Dimension	W x H x D=229mm x 105mm x 281mm		

### Attention:

All these specifications apply to the SDG800 Series Function/Arbitrary Waveform Generator unless otherwise explanation. To satisfy these specifications, the following conditions must be met first:

1. The instrument has been operating continuously for more than 30 minutes within specified operating temperature range (18°C~28°C).
2. The temperature variation does not exceed 5°C.

**Note: all specifications are guaranteed unless where noted 'typical'.**

Frequency Specification			
Model	SDG805	SDG810	SDG830
Waveform	Sine, Square, Ramp, Pulse, Noise, Arbitrary		
Sine	1μHz ~ 5MHz	1μHz ~ 10MHz	1μHz ~ 30MHz
Square	1μHz ~ 5MHz	1μHz ~ 10MHz	1μHz ~ 10MHz
Pulse	500μHz ~ 5MHz		
Ramp/Triangular	1μHz ~ 300kHz		
Gaussian white noise	>5MHz (-3dB)	>10MHz (-3dB)	>30MHz (-3dB)
Arbitrary	1μHz ~ 5MHz		
Resolution	1μHz		
Accuracy	Within 90days ±50ppm within 1 year ±100ppm		
Temperature coefficient	<5ppm/°C		

Sine Wave	
Harmonic Distortion	DC~1MHz <-60dBc
	1MHz~10MHz <-55dBc
	10MHz~30MHz <-50dBc
Total harmonic waveform distortion	DC~20kHz, 1Vpp<0.2%
Spurious signal(non-harmonic)	DC~1MHz<-70dBc 1MHz~10MHz<-60dBc 10MHz~30MHz<-55dBc
Phase noise	10kHz Offset, -108dBc/Hz(typical value)

Square Wave	
Rise/fall time	<24ns(10% ~ 90%)
Overshoot	<5%(typical, 1kHz, 1Vpp)
Duty Cycle	20%~80%
Asymmetric(50% Duty Cycle)	1% of period+20ns(typical, 1kHz, 1Vpp)
Jitter	500ps + 0.001% of period

Ramp/Triangle Wave	
Linearity	<0.1% of Vpp(typical, 1kHz, 1Vpp, 100% symmetric)
Symmetry	0%~100%

Pulse Wave	
Pulse width	16ns, Min. 1ns resolution
Rise/Fall time (10% ~ 90%, typical)	20ns~1.6ks
Duty Cycle	0.1%Resolution
Overshoot	<5%
Jitter(pk-pk)	500ps + 0.001% of period

Arbitrary Wave	
Waveform length	16k points
Vertical resolution	14bits
Sample rate	125MSa/s
Min. Rise/Fall time	8ns(typical)
Jitter(pk-pk)	8ns(typical)
Storage in non-volatile RAM memory (10 in total)	10 waveforms

Output Specification	
Amplitude	2mVpp~10Vpp(50Ω,≤10MHz) 2mVpp~5Vpp(50Ω,>10MHz) 4mVpp ~ 20 Vpp (High impedance, <10MHz) 4mVpp ~ 10Vpp (High impedance,>10MHz)
Vertical accuracy (100 kHz sine)	±(1mVpp +0.3dB of setting value)
Amplitude flatness (compared to 100 kHz sine,5Vpp)	±0.3 dB
Impedance	50Ω
Protection	short-circuit protection

DC Offset	
Range(DC)	±5V(50Ω) ±10V(High-Z)
Offset accuracy	±( setting offset value *1%+3mV)

AM Modulation	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary (2mHz ~ 20kHz)
Modulation depth	0% ~ 120%
DSB-AM Modulation	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary (2mHz ~ 20kHz)
Modulation depth	0% ~ 120%
FM Modulation	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary(2mHz~20kHz)
Frequency deviation	0 ~0.5*bandwidth 1mHz resolution

<b>PM Modulation</b>	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	Sine, Square, Ramp, Noise, Arbitrary (2mHz~20kHz)
Phase Deviation	0~360°, 0.1° Resolution
<b>FSK Modulation</b>	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	50% duty-cycle square waveform(2mHz~50kHz)
<b>ASK Modulation</b>	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Modulation waveform	50% duty-cycle square waveform(2mHz~50kHz)
<b>PWM Modulation</b>	
Frequency	500μHz~20kHz
Modulation waveform	Sine, Square, Ramp, Arbitrary(except DC)
<b>Sweep</b>	
Carrier	Sine, Square, Ramp, Arbitrary(except DC)
Type	linear/logarithmic
Direct	Up/down
Sweep time	1ms~500s
Trigger source	Manual, external, internal
<b>Burst</b>	
Waveform	Sine, Square, Ramp, Pulse, Arbitrary(except DC)
Type	Count(1~50,000 periods),infinite, Gated
Start/Stop phrase	0°~360°
Internal period	1μs~500s
Gated source	External trigger
Trigger source	Manual, External or Internal

<b>Trigger Input</b>	
Input Level	TTL compatible
Slope	Up or down
Pulse width	>100ns
Input impedance	>5kΩ,DC coupling

<b>SYNC Output</b>	
Voltage level	TTL compatible
Pulse width	>50ns
Output impedance	50Ω(typical)
Max. frequency	2MHz

## General Specification

<b>Display</b>	
Display type	3.5inch'TFT-LCD
Resolution	320×RGB×240
Color depth	24bit
Contrast Ratio	350:1(typical)
Luminance	300cd/m <sup>2</sup> (typical)
<b>Power</b>	
Voltage	100~240 VAC <sub>RMS</sub> , 45~66Hz, CATII
	100~127 VAC <sub>RMS</sub> , 45~440Hz, CATII
Consumption	<30W
Fuse	1.25A, 250V
<b>Environment</b>	
Temperature	Operation: 0°C~40°C
	Storage: -20°C~60°C
Humidity range	Below +35°C: ≤90% relative humidity
	+35°C~+40°C: ≤60% relative humidity
Altitude	Operation: below 3,000 meters
	Storage: below 15,000 meters
Electromagnetic Compatibility	2004/108/EC Directive
	Applicable standards EN 61326-1:2006
	EN 61000-3-2:2006 + A2:2009
	EN 61000-3-3:2008
Safety	2006/95/EC Low Voltage Directive
	EN 61010-1:2010
TUV	UL 61010-1:2012
	CAN/CSA-C22.2 NO.61010-1:2012
<b>Others</b>	
Dimension	Width: 229mm
	Height: 105mm
	Depth: 281mm
Weight	N.W: 2.6Kg
	G.W: 3.4Kg
<b>IP protection</b>	
IP2X	
<b>Calibration Cycle</b>	
1year	

## Purchase Information

### Product Name

**SDG800 Series Function/Arbitrary Waveform Generator**

### Models:

**SDG805 5MHz**

**SDG810 10MHz**

**SDG830 30MHz**

### Standard Accessories

- A Quick Start
- A Calibration Certificate
- A CD(including EasyWave computer software system)
- A Power Cord that fits the standard of destination country
- A USB Cable

### Optional Accessories

- BNC cable
- GPIB-USB Adapter

### Contact SIGLENT

**SIGLENT TECHNOLOGIES CO., LTD**

**Address: 3/F, No.4 BULIDING, 3<sup>rd</sup> LIUXIAN Rd, ANTONGDA INDUSTRY GARDEN,  
BAO'AN DISTRICT, SHENZHEN, CHINA**

**DENVER**  
*metrología electrónica, S.L.*

**Tel: +34 91 569 8006**

**info@denver.es - www.denver.es**